

Galaxy™ Hand Dryers - Touchless Automatic

Features

- › Ultra quiet hand dryer at 53 dB(a)
- › Advanced touchless technology turns unit on and off as hands are sensed
- › Unit is not programmed to run for a pre-determined time
- › Rugged construction
- › Contemporary design
- › Fast drying
- › Five-year warranty
- › Trouble free operation
- › Easy installation

Applications

Ideal for:

- › Restaurants
- › Office buildings
- › Banks
- › Hospitals
- › Athletic stadiums
- › Malls
- › Department stores
- › Gas stations
- › Prisons
- › Hotels
- › Schools
- › Airports
- › Professional offices



Models & Specifications

Model	Galaxy™ 1	Galaxy™ 2		Galaxy™ M 1	Galaxy™ M 2	
Item number	073009	073010		073724_*	073725_*	
Phase	Single	Single	Single	Single	Single	Single
Voltage	120 V	240 V	208 V	120 V	240 V	208 V
Wattage	1850 W	2000 W	1500 W	1850 W	2000 W	1500 W
Amperage	15.42 A	8.34 A	7.21 A	15.42 A	8.34 A	7.21 A
Min. required breaker size	20 A	15 A		20 A	15 A	
Min. required wire size	12 AWG	12 AWG		12 AWG	12 AWG	
Degree of protection (IP)	IP 23	IP 23		IP 23	IP 23	
Sound power level	53 dB(a)	53 dB(a)		53 dB(a)	53 dB(a)	
Air speed	NA	NA		NA	NA	
Air volume	90.0 CFM	95.0 CFM		90.0 CFM	95.0 CFM	
Drying time (approx.)	30 sec.	30 sec.		30 sec.	30 sec.	
Height	9.88" / 250 mm	9.88" / 26 mm		10.5" / 266 mm	10.5" / 266 mm	
Width	6.88" / 175 mm	6.88" / 175 mm		6.88" / 175 mm	6.88" / 175 mm	
Depth	9.06" / 230 mm	9.06" / 230 mm		9.06" / 230 mm	9.06" / 230 mm	
Weight	5.5 lb / 2.5 kg	5.5 lb / 2.5 kg		8.8 lb / 4.0 kg	8.8 lb / 4.0 kg	
Color	Alpine white	Alpine white		Alpine white Charcoal Gray (opt.) Silver Metallic (opt.)	Alpine white Charcoal Gray (opt.) Silver Metallic (opt.)	
Housing	ABS polycarbonate	ABS polycarbonate		Cast aluminum	Cast aluminum	






Certified to ANSI/UL Std. 499
Conforms to CAN/CSA Std. 22.2 No. 36



* Insert "S" for Silver Metallic / "G" for Charcoal Gray / Leave blank for Alpine White

Dimensions & Colors

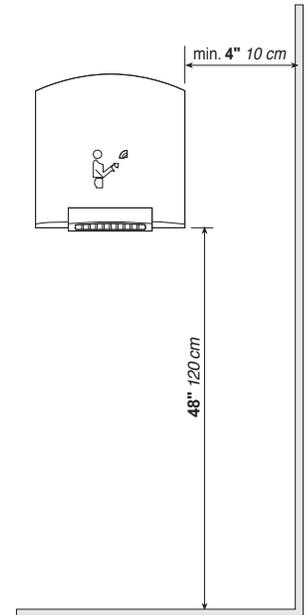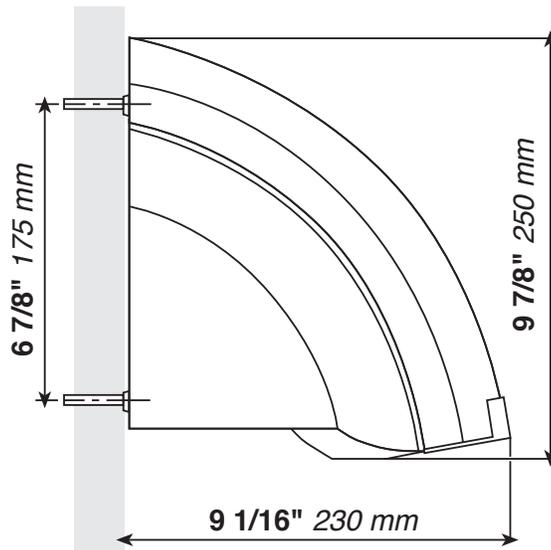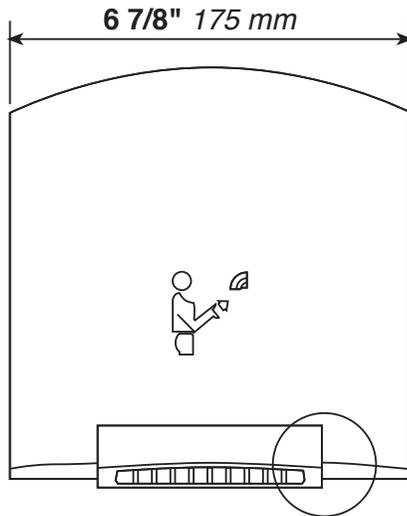

Specification

Galaxy™ 1 & 2 hand dryers shall be manufactured by Stiebel Eltron, Inc. to include a cover of ABS polycarbonate designed for light to medium traffic areas. Motor shall be thermally protected brush type with a single shaft. Dryer shall deliver 90 cubic feet per minute of air volume and shall be activated by an infrared sensor automatically detecting hands when present. Hand dryer shall be listed under of ETL as conforming to ANSI/UL Std. 499 and certified to CAN/CSA Std. 22.2 No. 36.

Galaxy™ M1 & M2 hand dryers shall be manufactured by Stiebel Eltron, Inc. to include a cover of cast aluminum designed for high traffic areas. Motor shall be thermally protected brush type with a single shaft. Dryer shall deliver 95 cubic feet per minute of air volume and shall be activated by an infrared sensor automatically detecting hands when present. Hand dryer shall be listed under of ETL as conforming to ANSI/UL Std. 499 and certified to CAN/CSA Std. 22.2 No. 36.

Engineer/Architect _____	Date _____
Job Name/Customer _____	Location _____
Contractor _____	Representative _____
	Qty kW Voltage Amps
Galaxy™ model _____	_____